



大 i want!
云旺科技
E&B

EASY & BEST SOLUTIONS

We propose a new way of working, aimed at achieving the best solution in the easiest way possible.

Just let us know your production requirements. We will take care of the rest.

本公司所銷售之商品均有投保3000萬產品責任險



大云旺科技股份有限公司
Iwant Technology Co., Ltd.

統編:47019944

No.609-15, Xinshu Rd., Xinzhuang Dist., New Taipei City 242, Taiwan (R.O.C.)

0800-202-112 0910-32-3399

www.inwant.tw

www.dobitec.tw



CEKING DOBITEC
COIN OPERATED LAUNDRY



超會賺錢的智慧洗衣機器人 LAUNDRY ROBOT

WASHER EXTRACTORS
SUSTAINABLE WASHING
FOR PROFESSIONALS



LAUNDRY EQUIPMENT



www.dobitec.tw

www.inwant.tw

DOBITEC 洗衣機器人 LAUNDRY ROBOT

DOBW SERIES WASHER EXTRACTORS SUSTAINABLE WASHING FOR PROFESSIONALS



機器的穩定來自長久成熟的生產製造經驗。 【熱水洗/一般洗衣/自動注洗劑/大容量/高運轉/澎湃洗淨】

- +** **DURABILITY 工業及結構超耐用**
The sturdy build of Dobitec washing machines means:
• They have a **long working life** and are virtually maintenance free.
- **PRODUCTIVITY 高效能穩定洗程 防呆不當機**
It is possible to adjust each washing parameter to suit the precise needs of each load (thereby saving time), as well as the stability in the process, which prevents unplanned stoppages, thus significantly increasing productivity.
- **WATER AND ENERGY CONSUMPTION 智慧省水 & 省電**
Patented water-saving design to effectiveness give low water level washing.
- +** **SAFETY 沉穩安全**
Dobitec washing machines have double safety features. The machine is only active if a closed door and locked door have been validated. In each washing cycle the system checks the dual status (open/closed) of the safety controls.
- C** **PROXIMITY 用心服務**
Dobitec extensive commercial and technical network around the world allows it to provide a permanent advice and follow up service directly, plus a quick and efficient technical response, with original spare parts.
- C** **EXPERIENCE 完美洗衣整合**
We pass on the know-how we acquire to our clients when defining the laundry project suited to their needs, with the continuous advice and training provided by the Dobitec Laundry Tips service.
This is how we achieve Easy & Best Solutions.

呵護如同手洗 PAMPERING THE FABRIC, TAKING CARE OF YOUR SKIN



For generations our mothers and grandmothers washed their linen in rivers or wash houses.

- Dobitec maintains the philosophy and wisdom of these generations: intensity, but with the care of one that appreciates each garment.

WASHER EXTRACTORS SUSTAINABLE WASHING FOR PROFESSIONALS



大

TIWI is the result of the study of the movement of water inside the drum. With a minimum level of water, and with recirculation through perforated blades, a cascade flow is generated, increasing the washing action, reducing cycle time and saving water.

温

HEATING ALTERNATIVES

Electric, steam and without heating (external hot water supply)

A hot and cold water mixer that achieves a highly precise temperature with the programmed water level, thereby saving energy and reducing the time of the wash cycle.

可選熱源：

1. 電熱
2. 一般



靜

TIWIs exclusive management and communication system between the inverter, motor and microprocessor ensures that the whole assembly is properly balanced and has a longer life. C Drive makes it possible control the speed, control imbalances and reduce noise (noise level lower than 80 dB), vibration and component fatigue.



真

真功夫 HARD-MOUNT TECHNOLOGY

1 EFFECTIVE SPINNING 高速脫水、低噪音

- Dobitec DOBWash Series washing machines operate at spin speeds of 500rpm (equivalent to 120 to 180G depending on the model), while the HCEW Series models reach 200G. Anchoring systems with a concrete base and a firm floor are required for proper installation and operation without noise or vibration.



2 STURDY DESIGN

- The design is based on the calculation of structural tensions to avoid critical points and achieve a very sturdy machine with a long service life even when operating under the most demanding conditions.
- The large drain evacuates the bath water quickly, as well as preventing clogging due to solid particles.

舒

洗衣機內槽使用304不鏽鋼，可耐臭氧洗衣過程。洗衣槽內桶均做微膜拋光處理。槽內光滑無毛邊不會產生勾紗現象!! 可充分保護您心愛的衣物。

- The drum is constructed in AISI - 304L stainless steel with a viton seal, resistant to washing processes using ozone.



WATERTIGHTNESS

- Watertightness is assured with a double radial and axial oil seal, which contains a large drainage chamber to protect the bearing housing from possible water infiltrations.
- The door uses an TIWI seal system with regulating adjustments.


www.inwant.tw

www.dobitec.tw

COMMERCIAL COIN OPERATED WASHER EXTRACTOR



嚴選

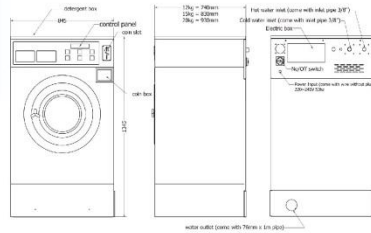

DOBITEC 洗衣機 規格表 Specification For Commercial Washing Machine (*) Optional (*) 可選擇


型號	Model	DOBW10	DOBW12	DOBW15	DOBW20
容量	Capacity KG / lbs	10kg / 22	12kg / 25	15kg / 35	20kg / 45
洗衣機寬度	Machine Width-mm (In)	850mm (33.46in)			
洗衣機深度	Machine Depth-mm(In)	740mm (29.13in)		830mm(32.68in)	
洗衣機高度	Machine Height-mm(In)	1350mm (53.15in)			
洗衣機內筒尺寸 (mm)	Drum Size-mm(In)	Dia.700 X 260		Dia. 700 x 390	
電壓 (*)	Electrical Requirements-V-Hz	220V/240V/380V/440V (50/60Hz) 1or3ph			
電熱管* (選擇)	Electrical Hot Element*	6kw		6kw x 2	
電機功率	Motor Power	1.5kw	1.5kw	1.5kw	2.2kw
洗滌轉速	Washing Speed-rpm	48			
中脫轉速	Mid Spin Drain-rpm	420			
高脫轉速	High Spin Drain-rpm / G	680 / 180			
水溫	Available Water Temperatures	冷、溫、熱 Cold, Warm, Hot			
自動控制板接受付款方式*	Self-service PLC Controller Accept	刷卡、Coin, Card, Apple pay、LINE pay、Google pay、悠遊卡、一卡通			
控制板 (*)	Laundry Controller PLC	投幣/常規 Coin Operated / Normal PLC			
控制板方式 (*)	PLC Available Languages	中英文 English & Chinese			
進水管	Water Inlet Connection-mm(In)	12.7mm (1/2in)			
出水管	Water Outlet Connection-mm(In)	76mm (3in)			
外觀	Body Cabinet	304 Stainless/S		375kg	
整體重量	Before Packing Machine Weighg-kg(lb)	320kg	345kg	375kg	405kg
箱體尺寸 - mm	Box Size WxDxH - mm	960x1050x1600			

機器規格以實際進口標示為準！本公司保有變更部分外觀及規格配備之權利！

STACK DRYER COMMERCIAL COIN OPERATED



嚴選

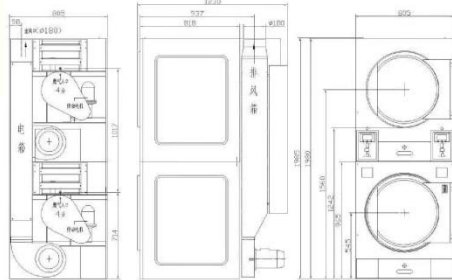

DOBITEC 烘衣機 規格表 Specification For Commercial Dry Machine

型號	Model	DOBD-12s	DOBD-15s
容量	Capacity KG / lbs	12kg x 2	15kg x 2
洗衣機寬度	Machine Width-mm	805	820
洗衣機深度	Machine Depth-mm(In)	1220	1220
洗衣機高度	Machine Height-mm(In)	1985	2100
洗衣機內筒尺寸 (mm)	Drum Size-mm(In)	Dia.680 x 680	
電壓 (*)	Electrical Requirements-V-Hz	220V/240V/380V/440V (50/60Hz) 1or3ph	
電機功率	Motor Power	0.74 x 2	0.92 x 2
乾衣電加熱功率	Electric heating-- kw	12 x 2	15 x 2
乾衣瓦斯加熱功率	Lpg consumption kg / batch	0.45 x 2	0.5 x 2
乾衣蒸氣加熱功率	Steam consumption kg / batch	35 x 2	40 x 2
乾衣天然瓦斯加熱功率	Natural Gas consumption kg / batch	0.57 x 2	0.84 x 2
熱源	Gas Heating BTU / h (kcal/h)	73000 / 18000	75000 / 19000
電熱管-- kw	Electric heating-- kw		
自動控制板接受付款方式 (*)	Self-service PLC Controller Accept	刷卡、Coin, Card, Apple pay、LINE pay、Google pay、悠遊卡、一卡通	
控制板 (*)	Laundry Controller PLC	投幣/常規 Coin Operated / Normal PLC	
控制板方式 (*)	PLC Available Languages	中英文 English & Chinese	
操作門直徑	Door dia. / mm	550	
排風口徑	Exhaust dia. / in	6"	
外觀	Body Cabinet	430 Stainless/S*	
整體重量	Before Packing Machine Weighg-kg(lb)	360kg	370kg
箱體尺寸 -mm / kg	Box Size WxDxH - mm	850 x 1340 x 2220 mm 重量是 420 kg	

機器規格以實際進口標示為準！本公司保有變更部分外觀及規格配備之權利！



CEKING COIN LAUNDRY

台灣NO.1 挑戰業界 最小機型最大容量 商用烘衣機系列

- 雙投幣雙向烘
- 最大容量低噪音
- 數百台實機案例
- 高效能工作機
- 最耐操耐用



- 打透專屬開戶設備、創業成功好幫手
- 變頻系統、電熱瓦斯烘乾
- 日本設計、台灣製造
- 隨開即關、安全防護
- 不鏽鋼機、粉彩烤漆
- 雙向烘乾、效能加倍
- 超大容量、智慧冷風

- 三大保證
- 1 堅固耐用
- 2 超低故障
- 3 品質堅持
- 精簡幹鍊
- 小易淨實
- 扎操俐耐
- 實作落操

Model no.	CEGD-15(C)	CEGD(s)-15
Drying capacity (1/20)	15KG / 35(lb)	15KG / 35(lb)
Drum dim.DxH (mm)	φ 700x710	φ 700x710
Volume	270	270
Door dia. (mm)	φ 550	φ 550
Basket motor (HP)	1/2	1/4
Exhaust motor (HP)	1/2	1/4
Exhaust dia. (in)	φ 6"	φ 6"
Gas dia. / mm	φ 10mm	φ 10mm
Gas Heating BTU/h (kcal/h)	75000 / 19000	78000 / 21000
Electric heating -- kw	15kw	15kw
Front bearing	UCF206	UCF206
Rear bearing	UKP207	UKP207
Basket speed (RPM)	39	40
Power supply	216-240	216-240
W x D x H	50/60Hz 1 or 3ph	50/60Hz 1 or 3ph
Net weight (KG)	780 x 110 x 173	760 x 110 x 195
	320	395

以上規格、製造商保有更改權力、一律以實際機體為準

